


1. CURVED WALK MEETS CURVED CURB

2. NEW CONCRETE
SUPPORT SHELF KEEPS
PAVER AND CURB
HEIGHT ALIGNED

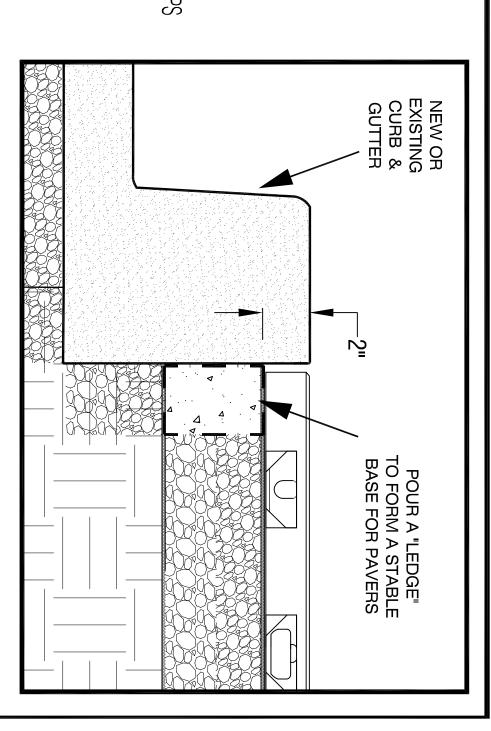

3. NEW OR EXISTING CURB: SUBSTRATE PACKED WITH SLURRY TO SUPPORT

(not shown in other drawings for simplicity)


3/16" SHIM (FOAMCORE, ETC. ) - IN ALL CASES

SLURRY, WELL TAMPED

NEW OR EXISTING CURB &

GUTTER

4. NEW OR EXISTING CURB:
PAVERS W/ TABS OR
RESTRAINTS. AS CONDITIONS
REQUIRE. NARROW FILLER
OF NEW POUR BETW CURB
AND PAVER

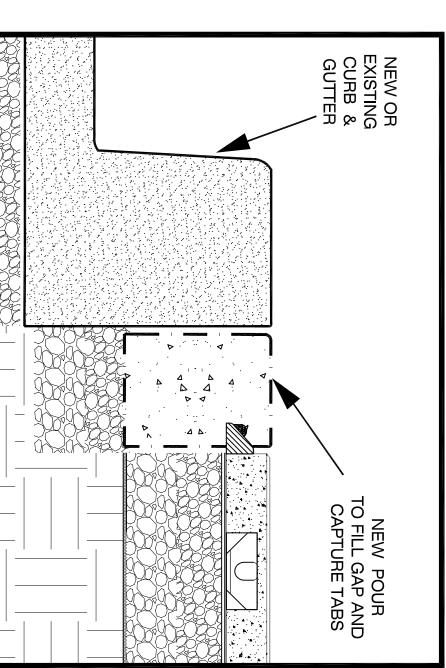



TERREWALKS®

When Terrewalks® abut curbs

scale: 3'' = 1'-0''

(depilication of curbs and substrate is generric, for illustration only. Local practices should be followed)